

POOL & SPA PUMPS



Emaux Pumps are engineered to deliver ultra performance to cater the needs of various requirements. They are both reliable and quiet running.



www.emaux.com.hk

POOL & SPA PUMPS




SC SERIES POOL PUMP SC 系列水泵



FEATURES

- The optimal performance is for medium head installations in medium pools or domestic pools
- Materials used are non-corrosive
- Using imported mechanical seal & bearing
- Extremely quiet running
- Patented internal heatsink to ensure maximum cooling capability
- Transparent lid for easy checking
- Designed for easy maintenance and repairs
- CE & CSA Standard
- 性能高，循环效率高，适合在中小型泳池使用
- 外壳采用防腐材料
- 采用进口的机械密封及轴承
- 操作时非常宁静
- 散热效果好
- 透明盖的设计方便检查
- 保养及维护简易
- 符合 CE 及 CSA 标准

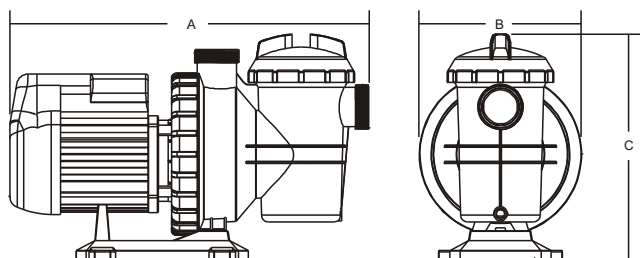


MOTOR 电机

- Asynchronous, Two poles 异步, 两极
- Class F insulation 绝缘等级 "F"
- IP55 Waterproof Standard IP55 防水标准
- Built in thermal protection 内置过热保护器
- CCC Standard 符合 CCC 标准

TECHNICAL CHARACTERISTICS 参数表

Code 产品编码	Model No 型号	A mm	B mm	C mm	Weight (kg) 重量	Connection size 接管尺寸	Output power 输出功率	Voltage (v) 电压	Capacitance 电容量
88021703	SC050	533	240	308	10.40	1½ inch 50mm	0.37Kw 0.5hp	220-240	14
88021704	SC075	533	240	308	12.10	1½ inch 50mm	0.56Kw 0.75hp	220-240	20
88021705	SC100	533	240	308	13.40	1½ inch 50mm	0.75Kw 1hp	220-240	25
88021707	SC150	533	240	308	14.90	1½ inch 50mm	1.10Kw 1.5hp	220-240	25
88021708	SC200	533	240	308	15.40	1½ inch 50mm	1.50Kw 2hp	220-240	30

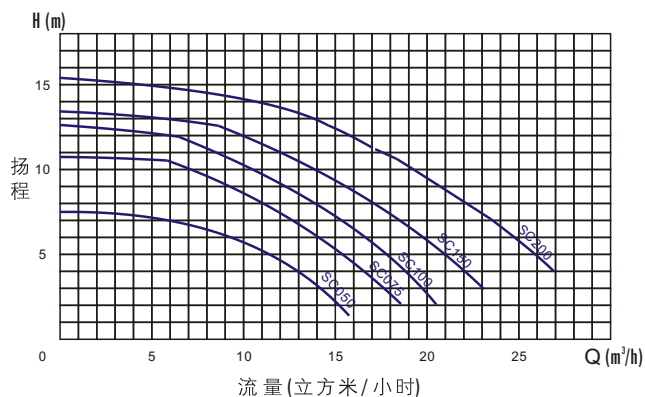

Model No 型号	Head Loss 扬程 (m)	4	6	8	10	12	14
SC050	Q m³/h 立方米/小时	13.00	9.50	****	****	****	****
SC075		16.60	14.20	11.20	7.00	****	****
SC100		18.80	16.80	14.00	10.70	6.50	****
SC150		22.20	20.00	17.00	14.00	10.00	****
SC200		27.00	24.80	22.30	19.50	16.00	11.00